




HP Omni 10 Battery Replacement

Instructions on how to remove and replace a battery for an HP Omni 10 tablet.

Written By: Alex Miller

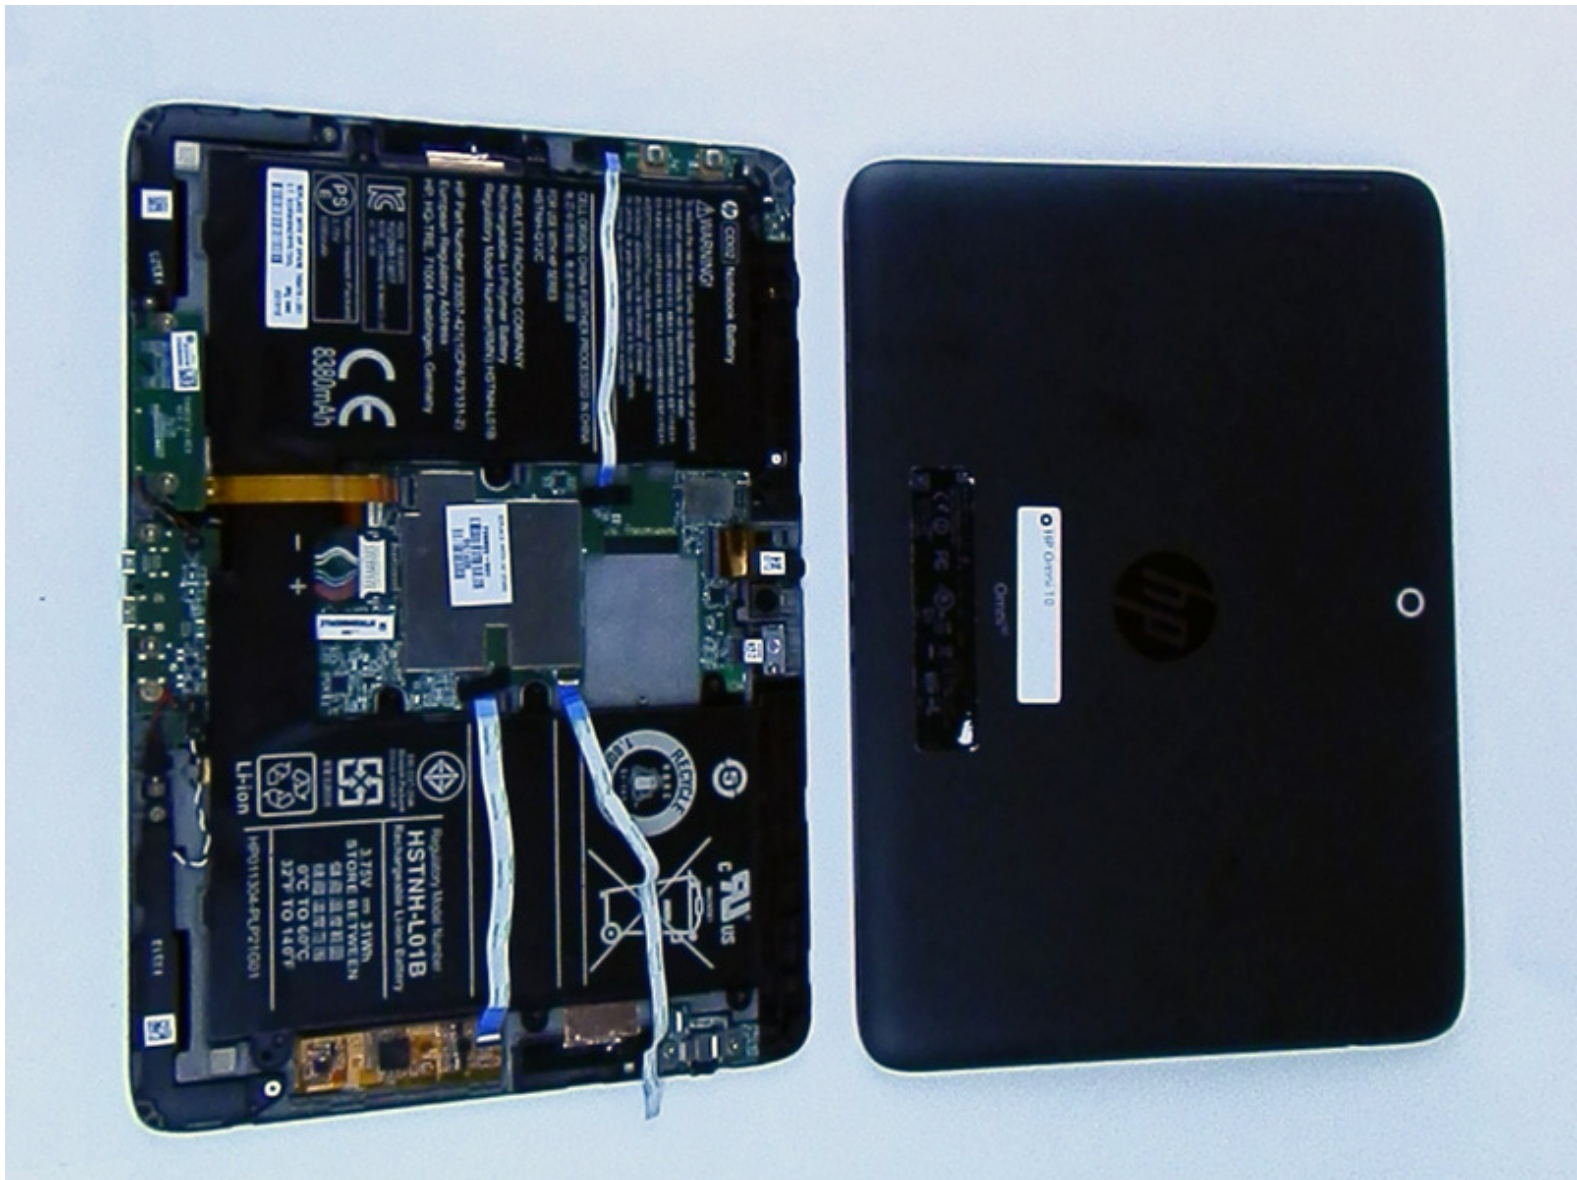

INTRODUCTION


Using a spudger and a 00 Phillips head screwdriver, this guide will show how to remove a battery from an HP Omni 10 tablet in roughly 5 to 10 minutes. Be careful with the battery, as it can be volatile when punctured with metal instruments.



TOOLS:

- [Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
-


Step 1 — Battery

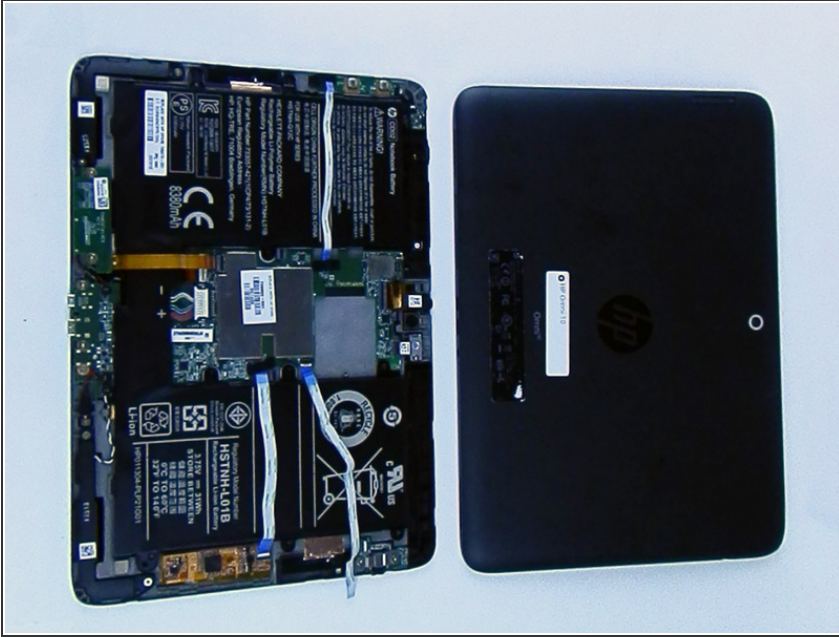

- Remove the back cover from the tablet.

i The cover is securely fastened to the device and may be difficult to remove.

Step 2

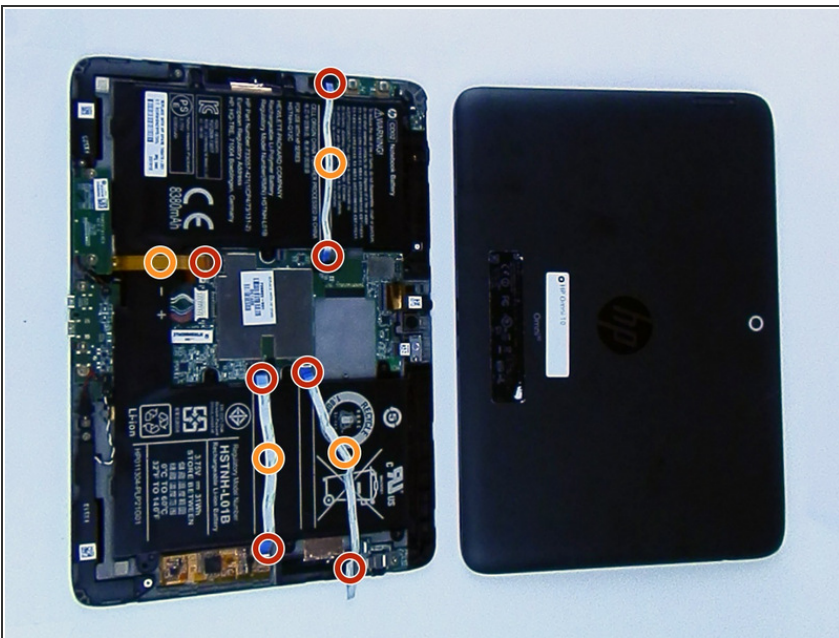

- Push the black plastic security flaps into an upward position.
- Lift the small tab on the security strips up and peel them across the battery. They will be attached via adhesive.
- Lift the tab on the strip up and pull it across the battery.

i The orange strip does not fully detach from the tablet like the other three. It will only detach from one side.

Step 3




- Unscrew the ten 3.3 mm screws securing the battery using a 00 Phillip's head screwdriver.

Step 4



- Unhook the cord from the edge of the battery.
- Pull the wire circuit out and down.

Step 5

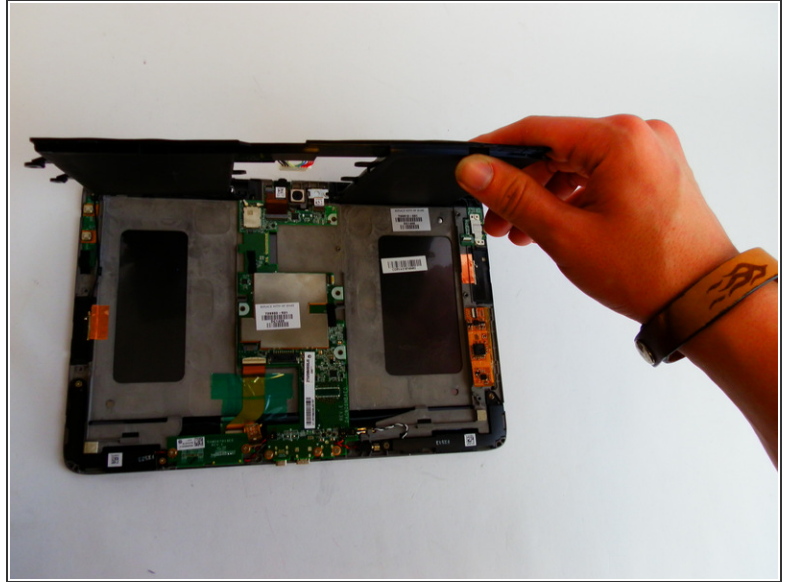

- Lift the battery up by its edges and remove it carefully. There will be adhesive holding the battery down.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 09:55:16 PM.